
SHAPELOT Sample design

L-1 Concept plan

Pergola, paver patio, brick walk, and fire pit

Conceptual, not for construction

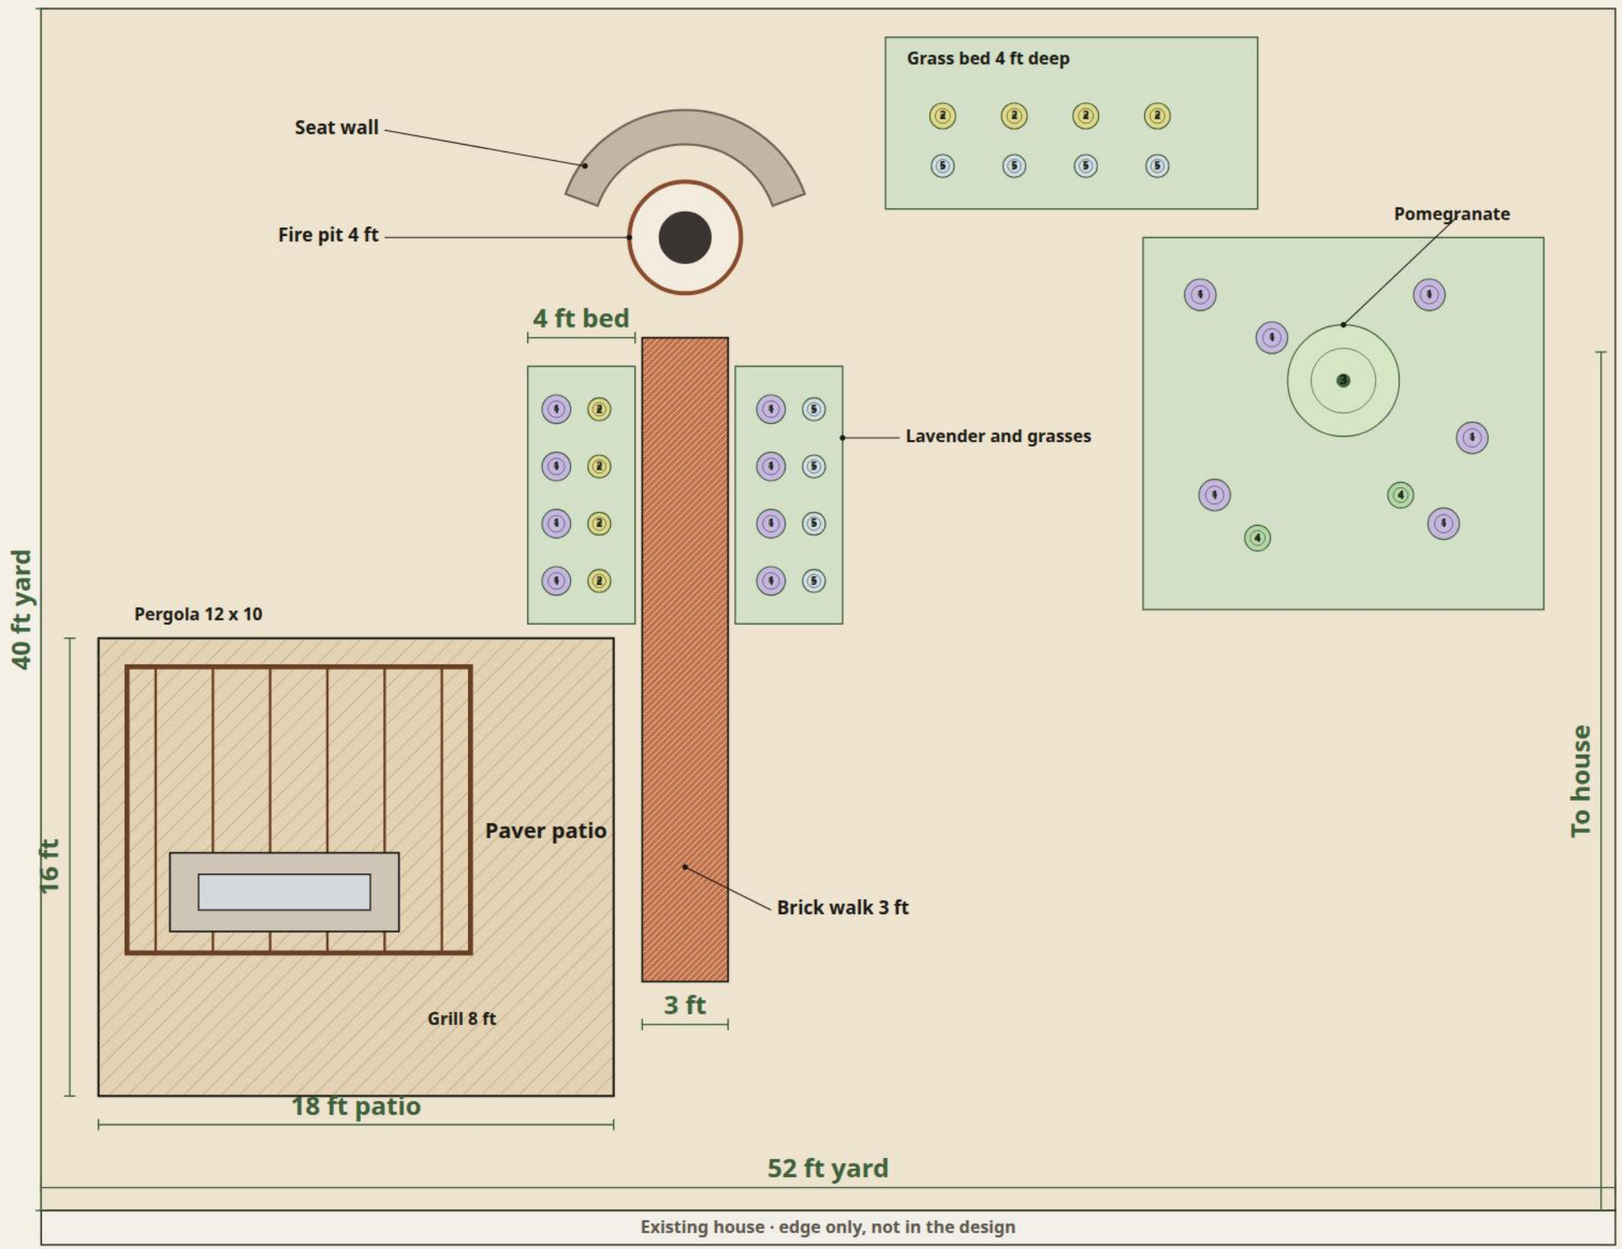

Plant schedule

Key Qty Botanical / common Size

1. **14 Lavandula angustifolia** — English lavender · 1 gal
2. **8 Muhlenbergia rigens** — Deer grass · 1 gal
3. **1 Punica granatum** — Pomegranate · 15 gal
4. **2 Salvia rosmarinus** — Rosemary · 1 gal
5. **8 Festuca glauca** — Blue fescue · 1 gal

Hardscape

- Concrete pavers, patio
- Clay brick, herringbone walk
- Timber pergola
- Stone grill counter
- Stone seat wall, 1 ft thick
- Planting bed, mulch

Notes

Drought-tolerant Central Coast palette.

No irrigation, grading, or drainage design.

Fire-pit clearance is a sample, not code.

Quantities match the symbols on this sheet.

Scale 1/8 in = 1 ft

0 4 ft 8 ft

ShapeLot · Central Coast

Project	**Sample yard A**
Sheet	**L-1 of 1**
Date	**November 2026**
Scale	**1/8 in = 1 ft**
Counties	**San Luis Obispo, Santa Barbara, Monterey**

A person reviews the concept. This sheet is not a stamp, a permit set, or a construction document.


Sample distances. Not a survey.

SHAPELOT Sample design

L-1 Concept plan

Decomposed granite, boulders, and native shrubs

Conceptual, not for construction

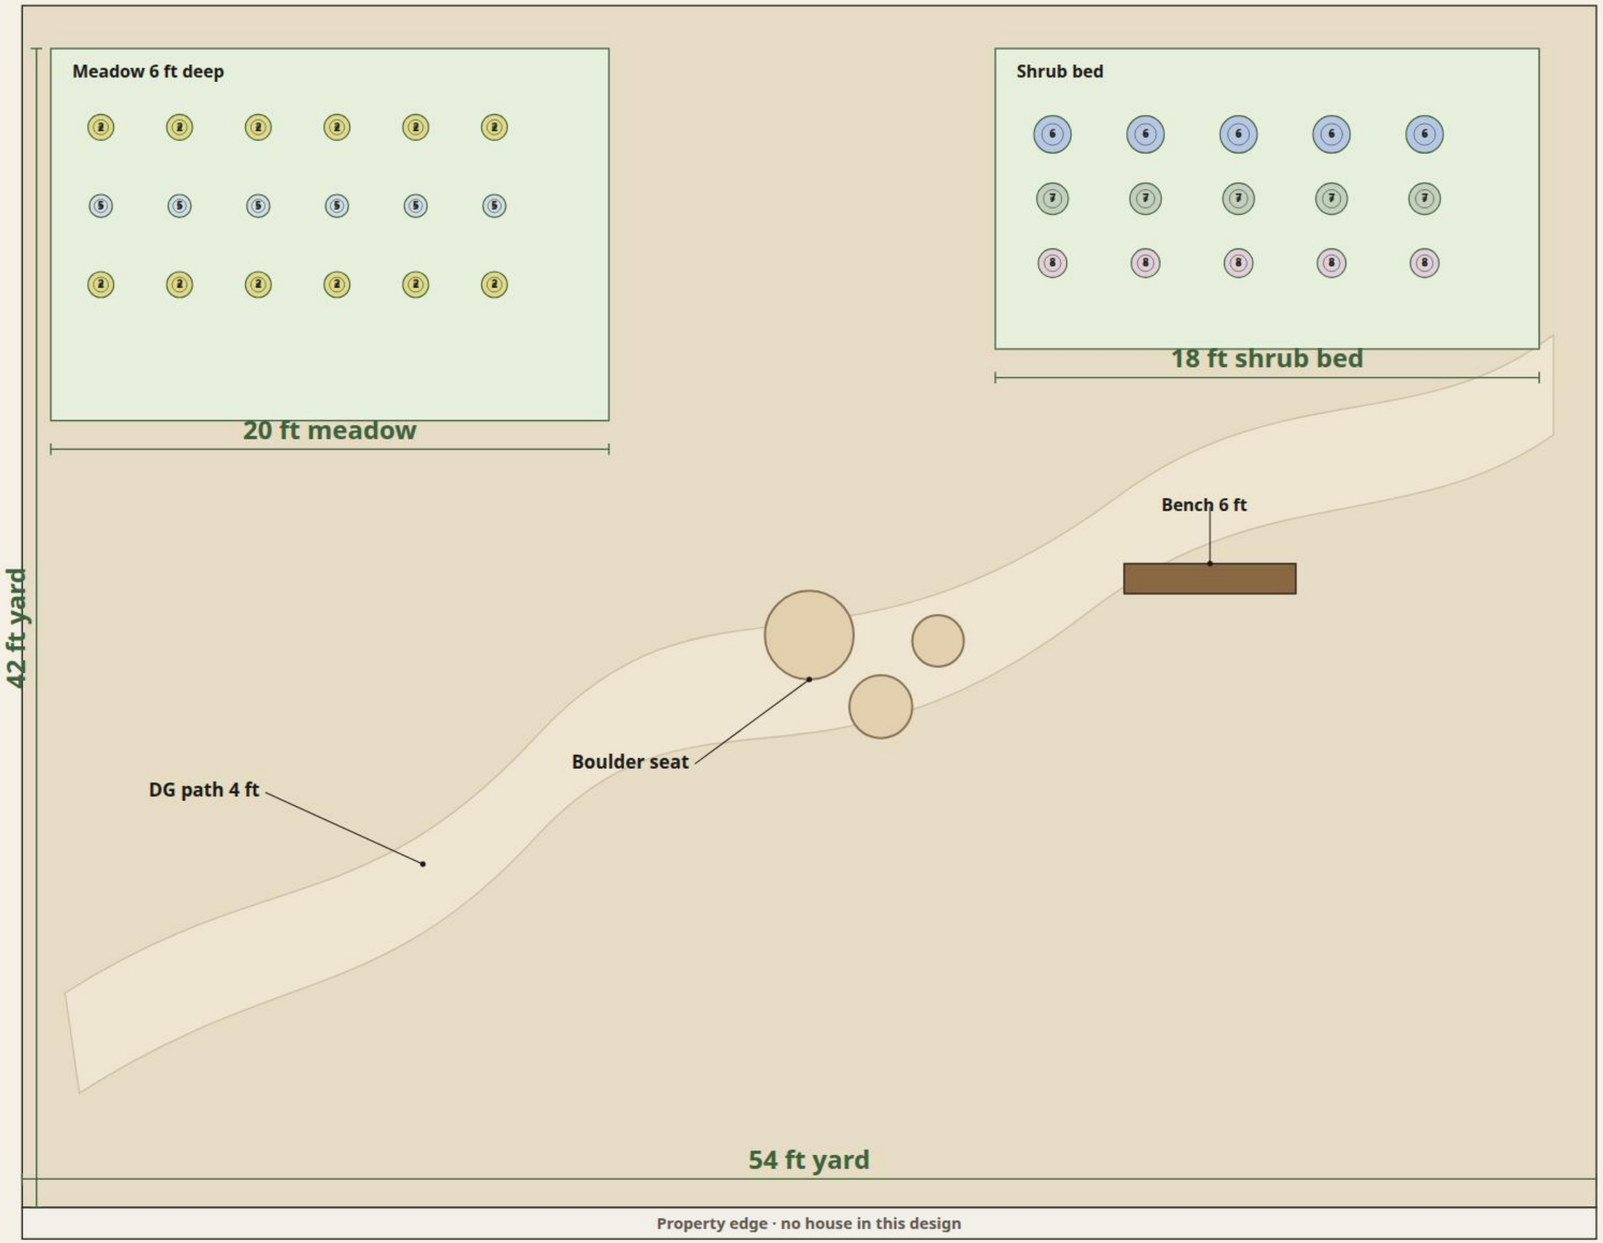

Plant schedule

Key Qty Botanical / common Size

- (2) **12 Muhlenbergia rigens** — Deer grass · 1 gal
- (5) **6 Festuca glauca** — Blue fescue · 1 gal
- (6) **5 Ceanothus** — California lilac · 5 gal
- (7) **5 Salvia clevelandii** — Cleveland sage · 1 gal
- (8) **5 Eriogonum fasciculatum** — California buckwheat · 1 gal

Hardscape

- Decomposed granite path
- Sandstone boulder seat
- Timber bench
- Native shrub and grass bed

Notes

No lawn in this sample.

Low-water Central Coast natives.

Not a botanical survey.

Conceptual, not for construction.

Scale 1/8 in = 1 ft

0 4 ft 8 ft

ShapeLot · Central Coast

Project	**Sample yard B**
Sheet	**L-1 of 1**
Date	**November 2026**
Scale	**1/8 in = 1 ft**
Counties	**San Luis Obispo, Santa Barbara, Monterey**

A person reviews the concept. This sheet is not a stamp, a permit set, or a construction document.


Sample distances. Not a survey.

SHAPELOT Sample design

L-1 Concept plan

Gravel terrace, olive, and citrus

Conceptual, not for construction

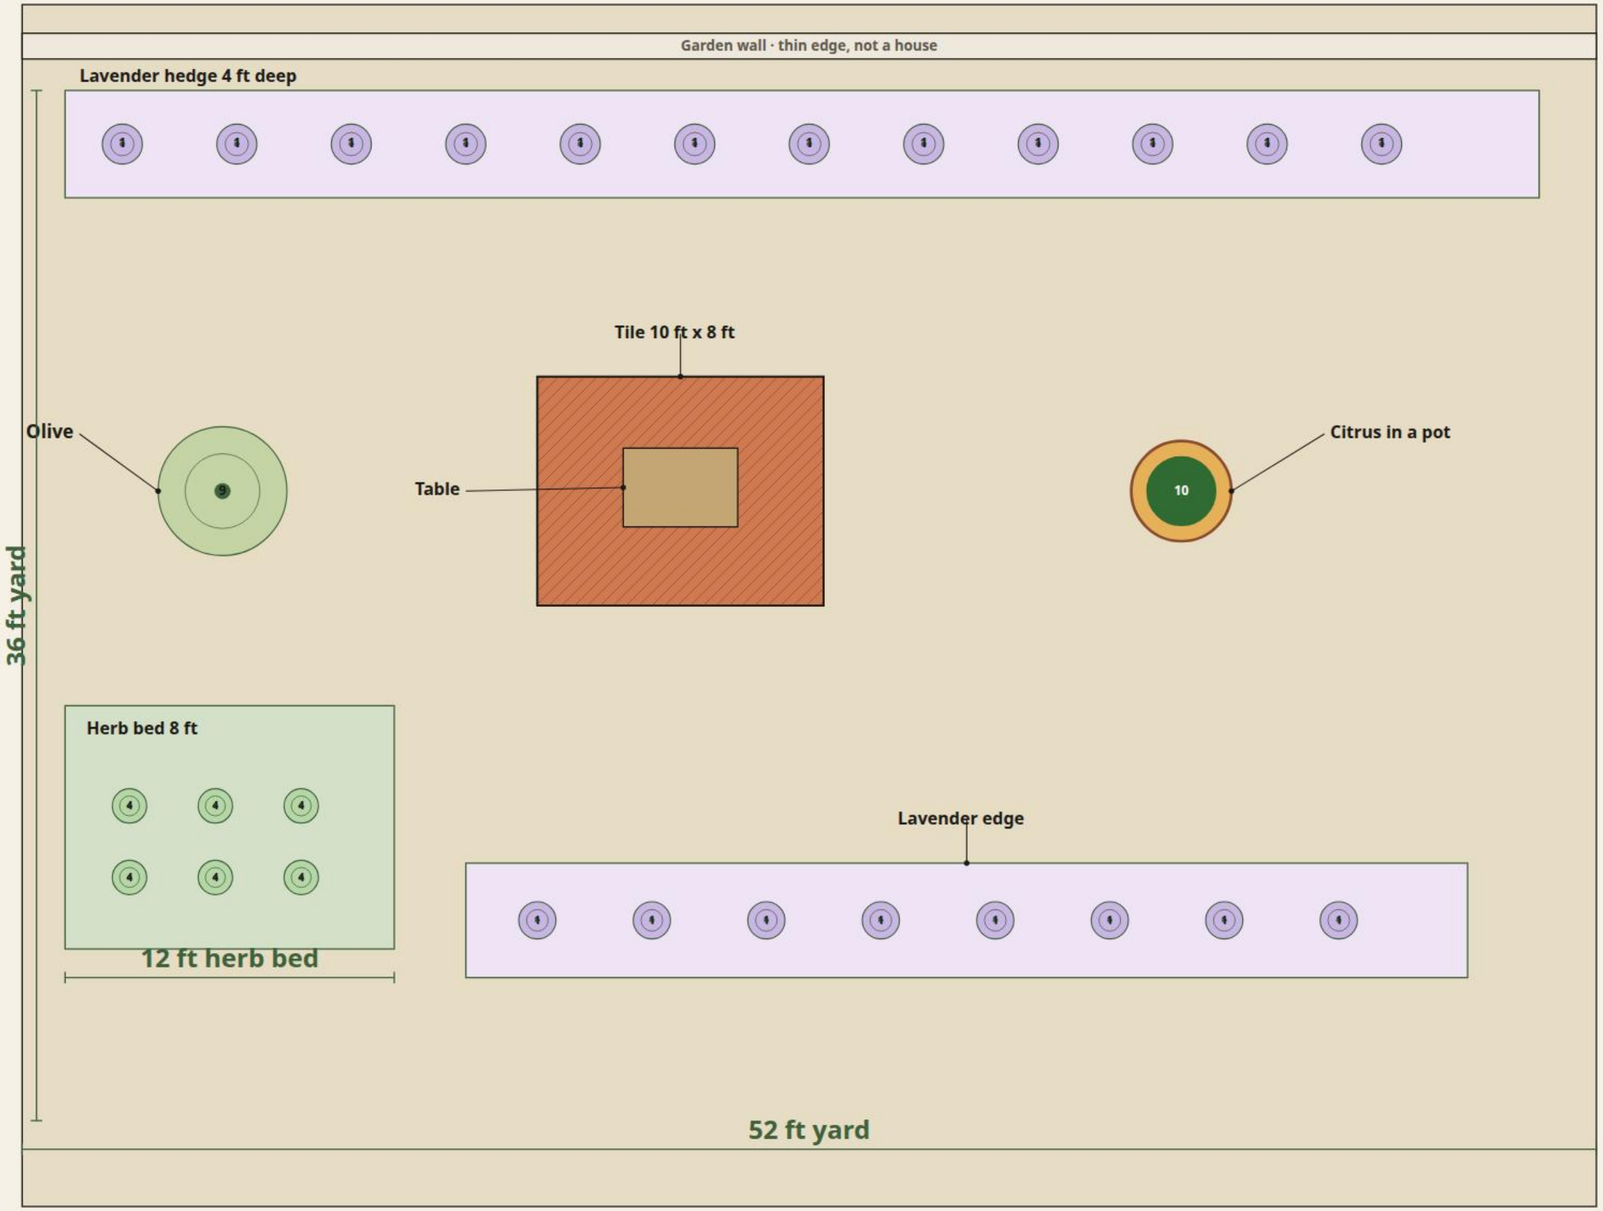

Plant schedule

Key	Qty	Botanical / common	Size
1	20	Lavandula angustifolia English lavender	1 gal
4	6	Salvia rosmarinus Rosemary	1 gal
9	1	Olea europaea Olive, fruitless	24 in box
10	1	Citrus Citrus in a container	15 gal

Hardscape

- Gravel terrace
- Terracotta tile inset
- Wood dining table
- Herb bed

Notes

Fruitless olive avoids paving stains.

Container citrus can move for frost.

No drainage design on this sheet.

Conceptual, not for construction.

Scale 1/8 in = 1 ft

0 4 ft 8 ft

ShapeLot · Central Coast

Project	**Sample yard C**
Sheet	**L-1 of 1**
Date	**November 2026**
Scale	**1/8 in = 1 ft**
Counties	**San Luis Obispo, Santa Barbara, Monterey**

A person reviews the concept. This sheet is not a stamp, a permit set, or a construction document.


Sample distances. Not a survey.

SHAPELOT Sample design

L-1 Concept plan

Concrete pavers, steel fire pit, and grasses

Conceptual, not for construction

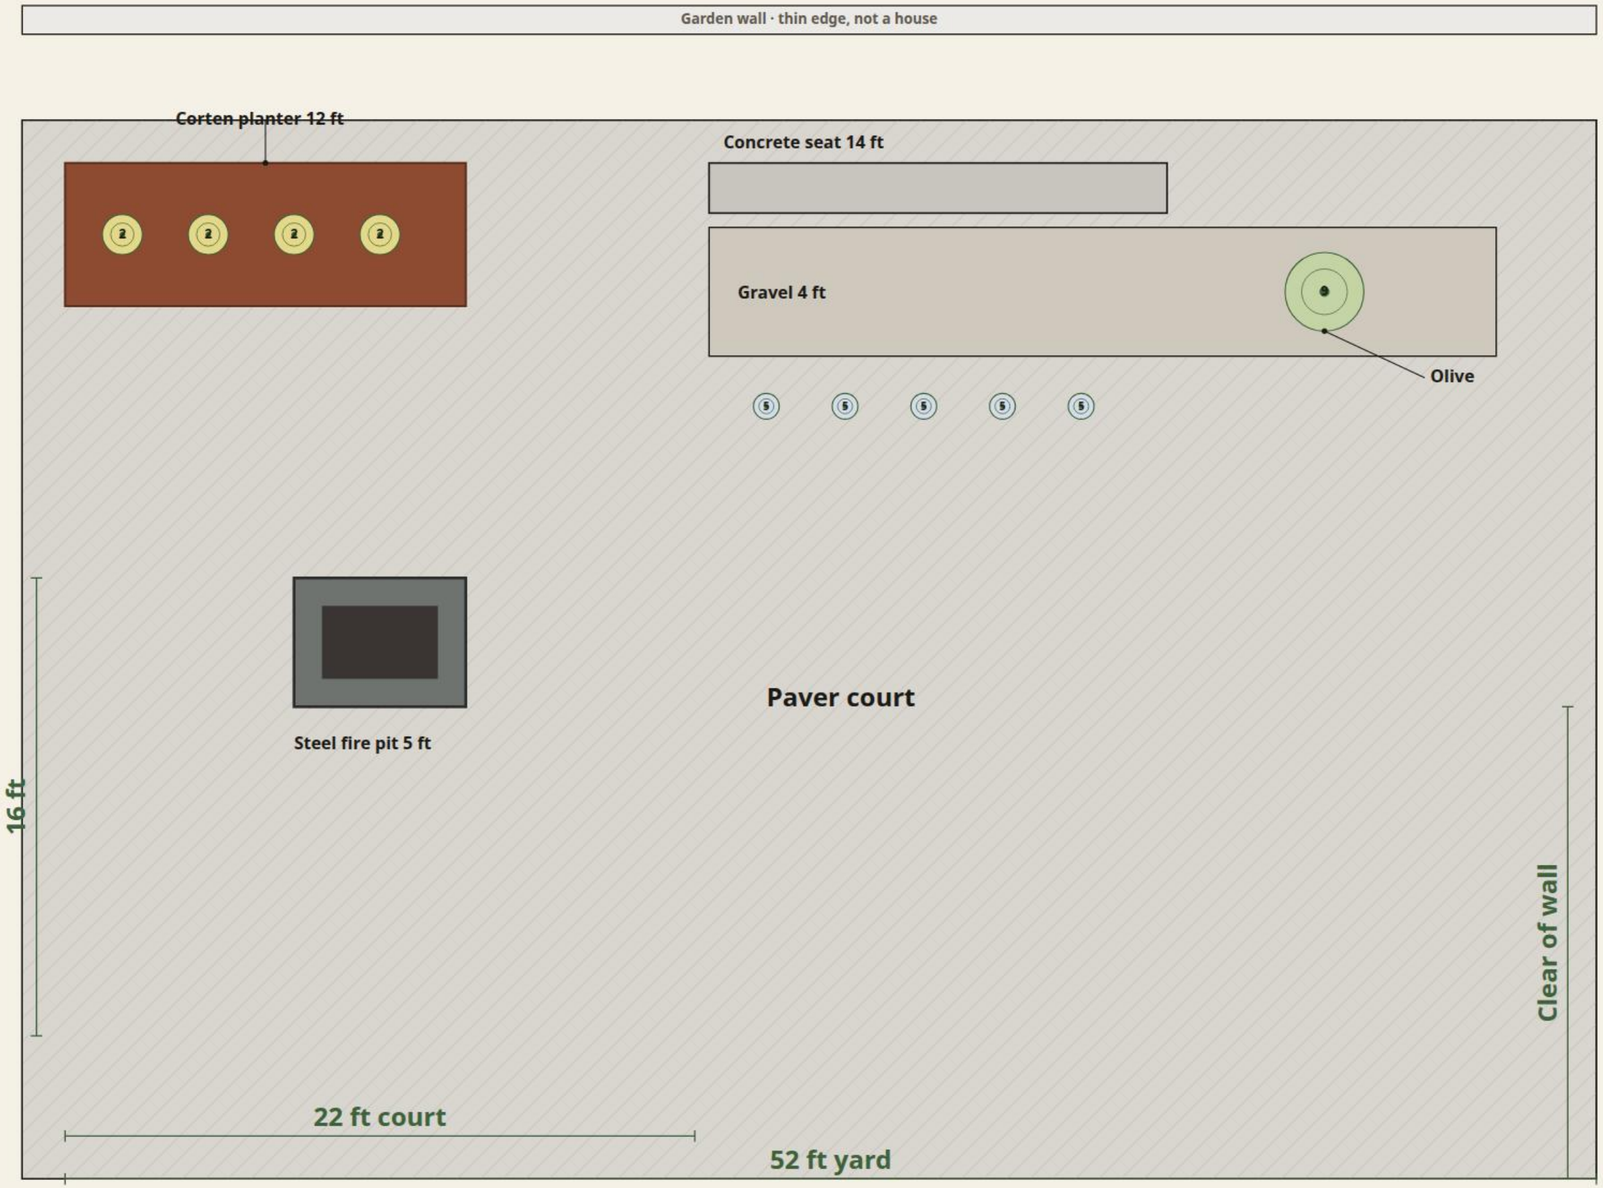

Scale 1/8 in = 1 ft

0 4 ft 8 ft

Plant schedule

Key	Qty	Botanical / common	Size
2	4	**Muhlenbergia rigens** Deer grass	1 gal
9	1	**Olea europaea** Olive, fruitless	24 in box
5	5	**Festuca glauca** Blue fescue	1 gal

Hardscape

- Concrete pavers, large format
- Steel fire pit
- Corten planter
- Cast-concrete seat
- Gravel joint strip

Notes

Modern hardscape sample.

Fire pit clearance is a sample, not code.

No structural design for the seat wall.

Conceptual, not for construction.

ShapeLot · Central Coast

Project	**Sample yard D**
Sheet	**L-1 of 1**
Date	**November 2026**
Scale	**1/8 in = 1 ft**
Counties	**San Luis Obispo, Santa Barbara, Monterey**

A person reviews the concept. This sheet is not a stamp, a permit set, or a construction document.

Sample distances. Not a survey.